

FORMAX[®]

AutoSeal[®] FD 2052

PRESSURE SEALER

Standard Features

- **Drop-In Feed System:** A drop-in three roller feed system produces dependable feeding of forms with no paper fanning required
- **Variable Speed Control:** Up to 11,000 pieces per hour
- **Pre-programmed for 3 popular folds:** Accordion "Z" fold, letter "C" fold and single half fold in 11" & 14" (Int'l Size A4)
- **17" Form Capability:** Flexibility to process forms up to 17" (432mm) in length
- **Programmable Job Settings:** Set and store up to nine custom jobs
- **Fault Detector:** Detects double feeding and any faults
- **6-Digit Resettable Counter:** Provides maximum audit control
- **Batch Counting:** Allows for preset counts of documents to be processed
- **Noise Reduction:** Top and side covers are insulated to reduce operating noise
- **Fold Types:** Z, uneven Z, C, Half and custom folds

Options:

- **P2052:** Cost saving package that includes the FD 2052, 18" conveyor and cabinet
- **4' High-Capacity Conveyor w/Photo Eye:** Allows for neat and sequential stacking of up to 1,500 processed forms
- **18" Conveyor w/Photo Eye:** Allows for neat and sequential stacking
- **Locking Cabinet:** Fully enclosed for storage
- **Big Bin Paper Stacking Cart:** Safely and securely transports documents
- **402 Series Jogger:** Reduces static electricity and aligns forms for proper feeding
- **FD 2000-35 Reverse Stacking Conveyor:** Allows for A-to-Z input and A-to-Z output.

Formax

New Hampshire, USA
www.formax.com

LOCAL DEALER: AUTOMATED BUSINESS MACHINES, INC.
6073 NW 167th Street, Suite C-24
Miami, FL 33015-4347
www.abmmiami.com
(305) 620-0020 • (954) 739-1222
(561) 833-9044 • (800) 446-5501
fax (305) 620-2201 • sales@abmmiami.com



Shown with optional cabinet and 18" conveyor

The AutoSeal[®] FD 2052 is a fully automatic pressure sealer which provides the ultimate solution for processing pressure sensitive self-mailers. Designed with ease of operation and efficiency in mind, the FD 2052 automatically detects and adjusts for 11" and 14" (Int'l Size A4) paper sizes and is pre-programmed for three popular folds: Z, C and Half folds. The FD 2052 also has the ability to store up to nine custom fold settings with the simple touch of a button.

The feed hopper can hold up to 350 forms which are processed at speeds up to 11,000 per hour. These features combine to make the FD 2052 an ideal solution for streamlining your post processing. Options include a fully enclosed cabinet for storage, an 18" (46cm) or 4' (122cm) high-capacity conveyor with photo eye for sequential stacking of processed forms, a reverse stacking conveyor for A-to-Z input and A-to-Z output, and a 402 Series Jogger to align forms for


proper feeding.

Flexible

The FD 2052 handles a variety of documents up to 8.5" (216mm) x 17" (432mm) including checks, invoices, school reports, tax forms and appointment notices. Pressure seal mailers can be used for virtually any application that can be printed on one form.

Powerful


The FD 2052 processes forms at a rate of up to 11,000 sheets per hour and can hold up to 350 - 24# (90 gsm) forms in the feed hopper. Combined with a duty cycle of up to 125,000 forms per month, the FD 2052 offers the ultimate solution for streamlining your paper processing.

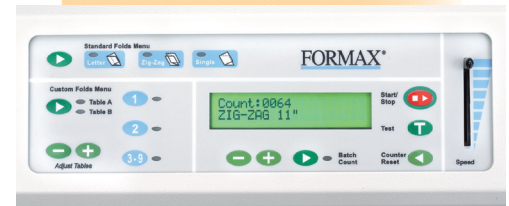

User Friendly Control Panel

Pressure Seal Solution

The AutoSeal® FD 2052, combined with a laser printer and pressure seal forms, creates a secure, time saving and efficient solution for paper processing.



Standard "Z" Fold Process

Easy to Operate

The FD 2052 sets a new standard in pressure seal ease-of-use. Z, C and Half folds for 11" and 14" (Int'l Size A4) forms are automatically set with the touch of a button. Up to nine custom folds can be stored into memory eliminating the need for manual setup of non-traditional pressure seal forms. The user-friendly control panel features LED indicators and a six-digit resettable counter.

Specifications:

Hopper Capacity:	Up to 350 Sheets 24# (90gsm)
Fixed Speed:	Up to 11,000 sheets per hour - based on 11" (279mm) "Z" fold
Paper Size:	Up to 8.5" W x 17" L (216 W x 432 L mm)
Power:	FD Model: 120 Volts AC 50/60Hz FE Model: 220 Volts AC 50/60Hz
Duty Cycle:	Up to 125,000 per month
Dimensions:	29.5" L x 16.75" W x 14" H (75 L x 43 W x 36 H cm)
W/ 18" Conveyor & Cabinet:	46" L x 20" W x 44" H (117 L x 51 W x 112 H cm)
Weight:	99.5 lbs (45 kg)
Document Sequence:	Standard sequence is A-to-Z input, Z-to-A output. Optional FD 2000-35 Reverse Stacking Conveyor available for A-to-Z output.
Certifications:	UL and CUL approved CE applied for



Standard Catch Tray



A **402 Series Jogger** is a recommended option that reduces static electricity from forms and aligns them for proper feeding